

DECK LIGHT - MODEL NUMBER - PAR 30 Downlight 4mm

underwater lights limited™

Manufacturers of the Original underwater lights™
Brand Marine Lighting Products since 1991

DESCRIPTION

The PAR 30 Adjustable flood light with screwed bezel is used for exterior downlighting onto areas such as decks or masts.

The fitting can only use a screwed 4mm thick glass bezel for installation onto areas not so exposed and does not require an insert. The light is available with a 150w Metal Halide lamp or a Halogen bulb - It can also accommodate various reflectors with beams of 8, 24 and 45 degrees. (45 degrees being the most common reflector).


The electronic ballast for the Metal Halide fitting is remote from the lamp.

The maximum distance from the ballast to the lamp is 10 meters.

The arrangement with the low voltage halogen has an integral transformer which can be removed if necessary.



Dimension for 150w HID
and 75w halogen

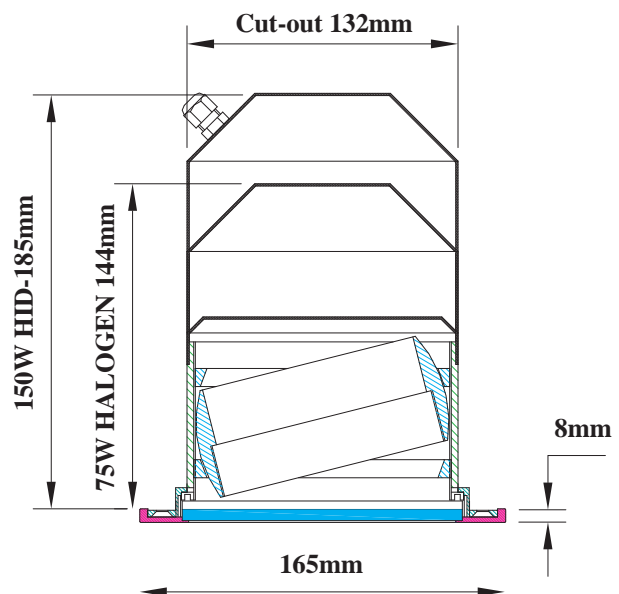

Lamp type - 150w Metal Halide. 75w Halogen

Voltage - 120v 230v ballast/ 12v or 24v

IP Rating - IP 55

Glass lens finish - Clear or Frosted (4mm)

Bezel Finish - 316 Stainless Steel

Insert -N/A

Ballast -S00800-A-V2/V3 - Transformer - 120/230V

NOTE-

Installation Instruction-

The hole cut-out should be 132 mm. Please see drawing above for dimension. The light is supplied with one meter of 3 core cable. Longer cable can be fitted on request.

A white silicone gasket is supplied for fitting between the deck head and the light flange.

Part no-

S23001- (150w HID) including 150w Ballast (S00800-A-V2/V3) with 4mm glass and S.S. Screwed bezel.

S23003 -V5/V6 for Halogen 75w max 12v/24v with 4mm glass and S.S. Screwed bezel.

S23003-V2 Halogen including 12v/230v transformer with 4mm glass and S.S. Screwed bezel.

S23003-V3 Halogen including 12v/120v transformer with 4mm glass and S.S. Screwed bezel.

For additional information please visit our web site.